

TECHNICAL BULLETIN

[Issue No.] GOT-A-0055

[Page] 1/2

[Title] Backlight model name errors indicated on GT1575-STB□ rating plate

[Date of Issue] November 2013

[Relevant Models] GOT1000 Series (GT15 model : GT1575-STBA, GT1575-STBD)

Thank you for your continued support of Mitsubishi Graphic Operation Terminal (GOT).

This bulletin provides information on the erroneous indication of the backlight model name on the GT1575-STB□ rating plate.

1. Precautions

On the rating plate of the GOT whose backlight is replaceable, the corresponding backlight model name is indicated. When the display appearance of LCD was improved in December 2006, the backlight model name was changed in accordance with LCD change.

The old backlight model name was incorrectly indicated on the target GOTs whose production period was written in the following chapter 3.

Please confirm the function version before purchasing or using the backlights for replacement.

Model name	Function version	Available backlight	
		GT15-70SLTT	GT15-70VLTT
GT1575-STBA/STBD	C or later	×	○
	B or earlier	○	×

2. Target GOT

GT15 model : GT1575-STBA, GT1575-STBD

3. Production period

Manufactured from December 2006 through September 2009 by Mitsubishi Electric Corporation.

TECHNICAL BULLETIN

[Issue No.] GOT-A-0055

[Page] 2/2

[Title] Backlight model name errors indicated on GT1575-STB□ rating plate


[Date of Issue] November 2013

[Relevant Models] GOT1000 Series (GT15 model : GT1575-STBA, GT1575-STBD)

4. How to confirm the function version


The following shows how to confirm the function version.

■ Indication of the rating plate (GOT rear face)

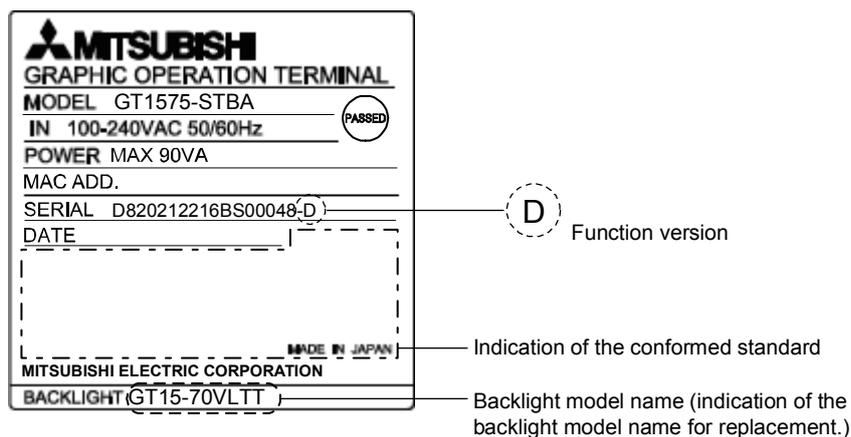

■ Packaging box

Confirm the function version on the label of the GOT packaging box.
The label position varies depending on the models or shipment time.

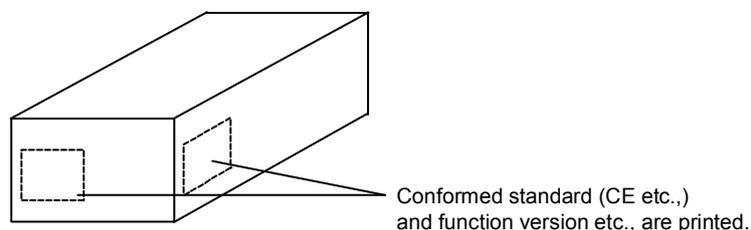

Version	Print date	Revision
*	November 2013	- First edition