

**TECHNICAL BULLETIN**
**[ 1 / 2 ]**

[Issue No.] GOT-A-0169

[Title] Compatibility Between GT Designer3 (GOT2000) Version and GT2103 Models' Hardware Version

[Date of Issue] July 2021

[Relevant Models] GOT2000 series

Thank you for your continued support of Mitsubishi Electric Graphic Operation Terminal (GOT). This bulletin informs you that the hardware version of some GT2103 models will be updated from B to C. The following describes the GT Designer3 (GOT2000) version compatible with the GOT hardware version C. This change does not affect the general specifications, performance specifications, functions, and external dimensions of the GOTs.

**1. Applicable models and details of the change**

| Applicable models |               | Details                                    | Reason                              | Remarks                                    |
|-------------------|---------------|--|-------------------------------------|--|
| GOT               | Model         |  |                                     |  |
| GT2103            | GT2103-PMBDS  | Change of the liquid crystal display (LCD) | Discontinuation of the current LCDs | Hardware version to be updated from B to C |
|                   | GT2103-PMBDS2 |  |                                     |  |
|                   | GT2103-PMBLS  |  |                                     |  |

**2. GT Designer3 (GOT2000) version**

GT Designer3 (GOT2000) versions earlier than 1.260W are incompatible with the GOT hardware version C. Use GT Designer3 (GOT2000) version 1.260W or later.

For details on GT Designer3 (GOT2000), contact your local sales office.


Table 2-1 Compatibility of the applicable models and GT Designer3 (GOT2000)

○: Compatible ×: Incompatible

| GT Designer3 (GOT2000) version | Hardware version of the applicable models |            |
|--------------------------------|---|------------|
|                                | B or earlier                              | C or later |
| Earlier than 1.260W            | ○   | ×          |
| 1.260W or later                | ○   | ○          |

**3. How to check the hardware version**

Check the rating plate on the GOT rear face for the hardware version.

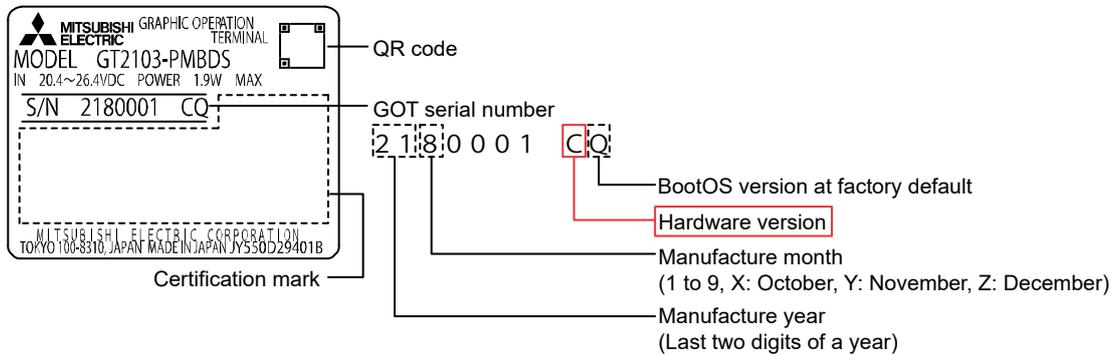

**4. Schedule**

The hardware version of the applicable models will change from B to C from the August 2021 production. There may be cases where both the former and new products exist in the distribution stage.

**REVISIONS**

| Version | Print Date | Revision        |
|---------|------------|-----------------|
| -       | July 2021  | - First edition |