

TECHNICAL BULLETIN

[Issue No.] T20-0009

[Page] 1/3

[Title] INSTRUCTIONS ABOUT THE USAGE OF
GX Explorer

[Date of Issue] October '01

[Relevant Models] GX Explorer Version1 (SW1D5C-EXP-E)

Thank you for your continued support of Mitsubishi Integrated FA Software MELSOFT Series.
This bulletin describes the cautions for using GX Explorer in an environment where GOT and AJ65BT-R2 are connected to a CC-Link network.

Whereas

1. GOT-A900series or GOT800series connected with CC-Link network system

To operate the GX Explorer in the above system, GOT-A900 series must have the PLC communication driver version 8.7.0 or later, GOT800series must have the PLC communication driver version 5.7.1 or later. If the previous versions are used, proper operations cannot be assured. Reset GOT-A900 series or GOT800 series to operate normally, if it stops operation.

Table 1. PLC communication driver version for proper operations

Series name	Model name	CC-Link connection module	PLC Communication driver version
GOT-A900	A985GOT-***(-V) A975GOT-***(-B) A970GOT-***(-B) A985GOT-***-EU A975GOT-***-EU A970GOT-***-EU A960GOT-***(-EU) A956WGOT-*** A956GOT-***(-M3)	A8GT-J61BT13	1. Model name / Version SW5D5C-GOTR-PACKE SW5D5C-GOTR-PACKEV SW5D5C-GTWORKS-E Version: Ver. 18U or later 2. [PLC Communication driver] is the CC-Link(ID) 3. [S/W version] of PLC driver is Ver.8.7.0 or later. (Refer: 1.1 Version Confirmation method)
GOT800	A8GT-70GOT-*(-EU(N)) A8GT-70TOP-** A8GT-10GOT-* A850GOT-***(-M3)	A8GT-J61BT13	1. Type / Version SW3NIW-A8SYSP Version: Ver. U or later 2. [PLC Communication driver] is the CC-Link (ID) 3. [S/W version] of PLC driver is Ver.5.7.1 or later. (Refer: 1.1 Version Confirmation method)

(To the next page)

 **MITSUBISHI ELECTRIC CORPORATION**

HEAD OFFICE : 1-8-12, OFFICE TOWER Z 14F HARUMI CHUO-KU 104-6212, JAPAN
NAGOYA WORKS : 1-14, YADA-MINAMI5, HIGASHI-KU, NAGOYA, JAPAN

[Issue No.] T20-0009

[Page] 2/3


[Title] INSTRUCTIONS ABOUT THE USAGE OF
GX Explorer

[Date of Issue] October '01


[Relevant Models] GX Explorer Version1 (SW1D5C-EXP-E)

1.1 Version confirmation method

1. Touch the Memory information

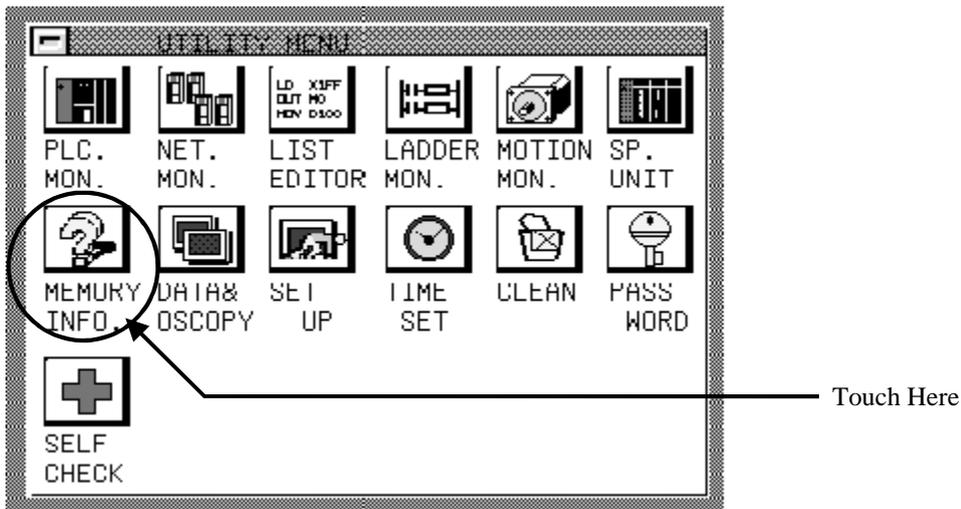

2. Check the PLC Communication driver version

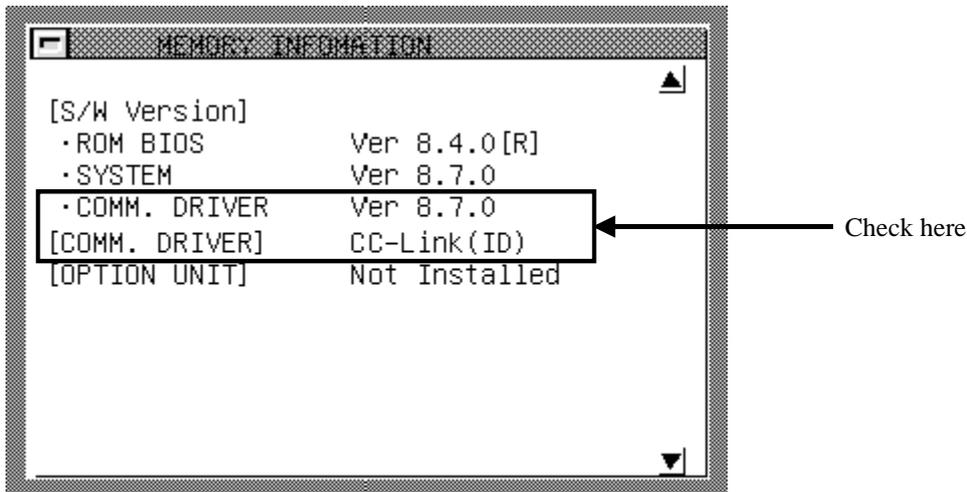

(To the next page)

TECHNICAL BULLETIN

[Issue No.] T20-0009

[Page] 3/3

[Title] INSTRUCTIONS ABOUT THE USAGE OF
GX Explorer

[Date of Issue] October '01

[Relevant Models] GX Explorer Version1 (SW1D5C-EXP-E)

2. AJ65BT-R2 connected with CC-Link network system

To operate the GX Explorer in the above system, the supporting software version should be (*****E) or later. If the previous versions are used, proper operations in AJ65BT-R2 cannot be assured.

Reset AJ65BT-R2 to operate normally, if it stops operation.

Table 2. Supporting software version for proper operations

Model name	Supporting version
AJ65BT-R2	S/W version E (*****E) (Refer: 2.1 Version Confirmation Place)

2.1 Version Confirmation Place

