



Numerical Relay MELPRO™-S Series

Feeder Protection Relay



Description

MELPRO-S Series is a numerical type protection relay with a microprocessor for protecting high/extra-high-voltage electric power system.

This series of protection relay will provide stable and effective control and monitoring of electric power systems as well as high-reliable protection.

Features

- **Flexible and reliable protection functions**

- Fine setting step of protection elements enables flexible use for various applications.
- 16 kinds of operation time characteristics and wide setting range of time multiplier are available for overcurrent protection element.
- Fault record function (10 records at a maximum) is provided for fault analysis.
- Modbus interface using RS-485 is provided for remote communication.
- Password-protected human-machine interface enables secured operation.

- **Highly Accurate Digital Computation**

The digital computation using high-speed sampling minimizes the effect of harmonics, etc., and provides highly accurate protection.

- **Self-diagnosis**


The continuously monitoring of electronic circuits from input to output can detect internal failure before the failure causes damage on the power system.

- **Compact size**

The compact relay designed for space-saving is suitable for replacement of existing ones.

- **Energy saving**

Low power consumption of the relay is effective in miniaturization of CT and VT as well as energy saving.

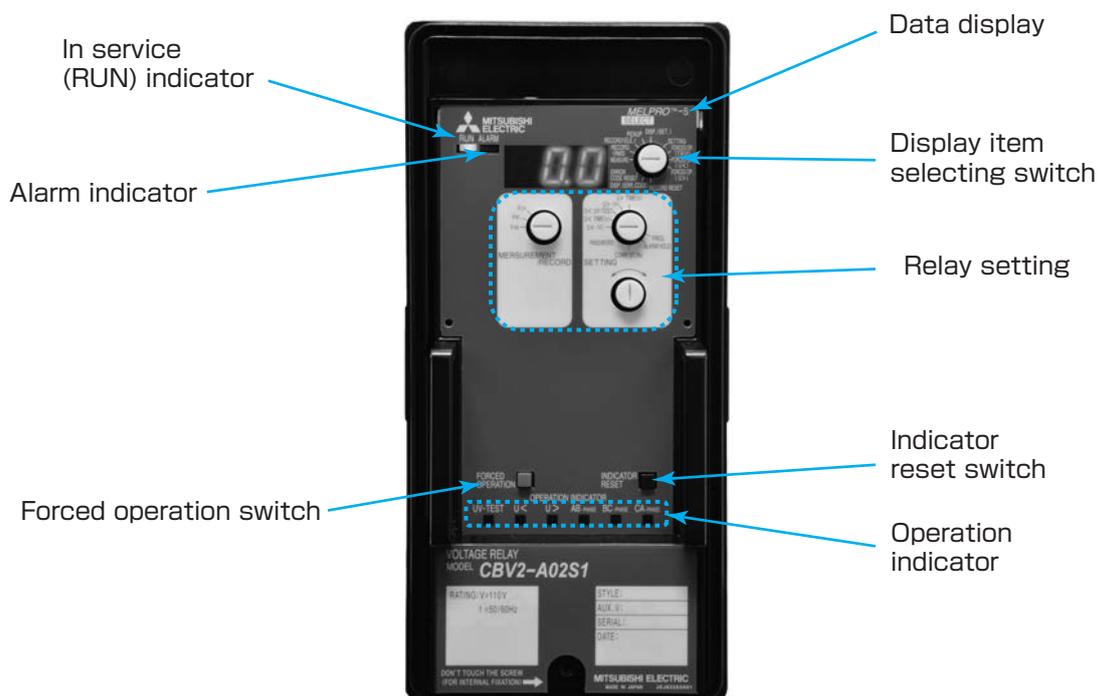


Front view (cover removed)

Common Technical Data

I T E M		DESCRIPTION		CONDITION	STANDARD
Environment	Ambient operating temperature	-10°C to +55°C			IEC60255-6
	Ambient storage and transport temperature	-25°C to +70°C			IEC60255-6
	Damp heat	+40°C,95%RH,4days			IEC60068-2-78
Ratings	Auxiliary power supply	110VDC,110VAC (Applicable to any voltage above)			IEC60255-6
	Operative range of auxiliary power supply	DC:-15% to +10% (Temporarily -20% to +30%) AC:-15% to +10% (Temporarily -15% to +15%)			IEC60255-6
	Frequency	50/60Hz			IEC60255-6
	VT CT	See manual of each relay type			
Burden	Auxiliary power supply				
	VT CT	See manual of each relay type			
	VT CT				
Thermal withstand	VT	1.15VN,3h			
	CT	40IN,1s			
Contact capacity	For trip	Make	110V DC:15A,0.5s 220V DC:10A,0.5s	(L/R=0)	
		Break	110V DC:0.3A 220V DC:0.15A	(L/R≤40ms)	
	For control and alarm	Break	10VA 10W	(COS φ =0.4) (L/R=0.007s)	
		Max. current	5A		
		Max. Voltage	380VAC/125VDC		
Dielectric test	Circuit of 60V or below	500VAC,1min		1)Between each circuit and the exposed conductive parts, the terminals of each independent circuit being connected together 2)Between independent circuits, the terminals of each independent circuit being connected together	IEC60255-5
	Circuit of more than 60V and 500V or below	2000VAC,1min			
	Open contact	1000VAC,1min			
Impulse voltage test		5kV, 1.2 μs/50 μs		1)Between each circuit and the exposed conductive parts, the terminals of each independent circuit being connected together 2)Between independent circuits, the terminals of each independent circuit being connected together	IEC60255-5
High-frequency disturbance test	Common mode	2.5kV peak,1MHz with 200 Ω source impedance for 2s		Between independent Circuits, and between independent circuit and earth	IEC60255-22-1 class 3
	Differential mode	1.0kV peak,1MHz with 200 Ω source impedance for 2s		Across terminals of the same circuit	
Electrostatic discharge test		8kV		Contact discharge	IEC60255-22-2 class 3
		8kV		Air discharge	
Fast transient disturbance test		2.0kV,5ns/50ns,1min			IEC60255-22-3
Vibration test		Refer to class 1			IEC60255-21-1 class 1
Shock response		Refer to class 2			IEC60255-21-2 class 2
Enclosure protection		IP51			IEC60529

VN : Rated voltage IN : Rated current

Operation Time characteristics of Overcurrent Element

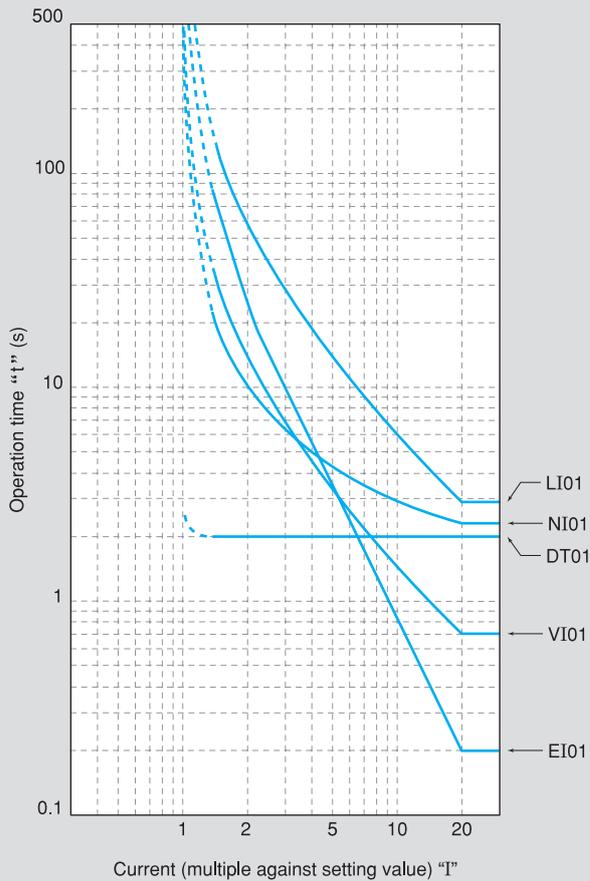

NI01 : Normal inverse time-lag characteristic

$$t = \frac{0.14}{I^{0.02-1}} \times \frac{M}{10} \text{ (s)}$$

VI01 : Very inverse time-lag characteristic

$$t = \frac{13.5}{I-1} \times \frac{M}{10} \text{ (s)}$$

EI01 : Extremely inverse time-lag characteristic

$$t = \frac{80}{I^2-1} \times \frac{M}{10} \text{ (s)}$$

LI01 : Long inverse time-lag characteristic

$$t = \frac{54}{I-1} \times \frac{M}{10} \text{ (s)}$$

DT01 : Definite time-lag characteristic


$$t = 2 \times \frac{M}{10} \text{ (s)}$$

t : Operation time

I : Input current multiplying factor against set value

M : Operation time multiplier(times)

4

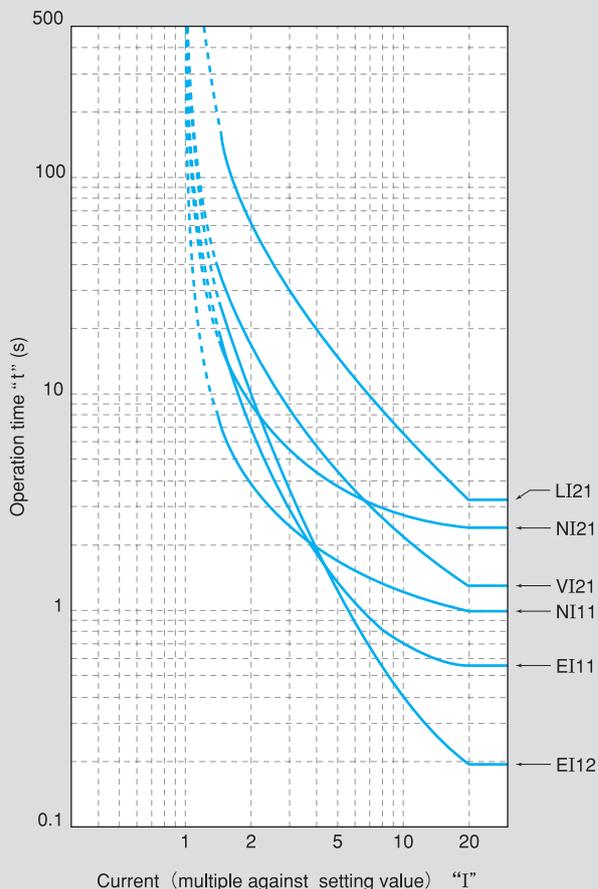

NI11 : Normal inverse time-lag characteristic

$$t = \left(\frac{0.0515}{I^{0.02-1}} + 0.114 \right) \times \frac{M}{10} \text{ (s)}$$

EI11 : Extreme inverse time-lag characteristic

$$t = \left(\frac{19.61}{I^2-1} + 0.491 \right) \times \frac{M}{10} \text{ (s)}$$

EI12 : Extremely inverse time-lag characteristic

$$t = \left(\frac{28.2}{I^2-1} + 0.1217 \right) \times \frac{M}{10} \text{ (s)}$$

NI21 : Normal inverse time-lag characteristic

$$t = \left(\frac{2.4}{I^{0.4-1}} + 1.2 \right) \times \frac{M}{10} \text{ (s)}$$

VI21 : Very inverse time-lag characteristic

$$t = \left(\frac{16}{I-1} + 0.4 \right) \times \frac{M}{10} \text{ (s)}$$


LI21 : Long inverse time-lag characteristic

$$t = \frac{60}{I-1} \times \frac{M}{10} \text{ (s)}$$

t : Operation time

I : Input current multiplying factor Against set value

M : Operation time multiplier

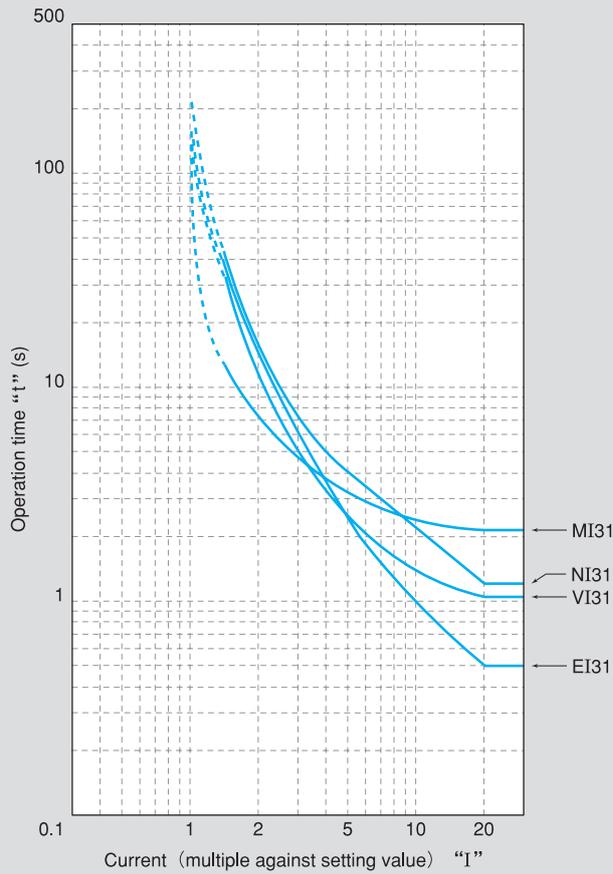

MI31 : Moderately inverse time-lag characteristic

NI31 : Normal inverse time-lag characteristic

VI31 : Very inverse time-lag characteristic

EI31 : Extremely inverse time-lag characteristic


$$t = M \left(A + \frac{B}{I - C} + \frac{D}{(I - C)^2} + \frac{E}{(I - C)^3} \right)$$

t : Operation time

I : Input current multiplying factor against set value

M : Operation time multiplier

	MI31	EI31	NI31	VI31
A	0.1735	0.0399	0.0274	0.0615
B	0.6791	0.2294	2.2614	0.7989
C	0.8000	0.5000	0.3000	0.3400
D	-0.0800	3.0094	-4.1899	-0.2840
E	0.1271	0.7222	9.1272	4.0505

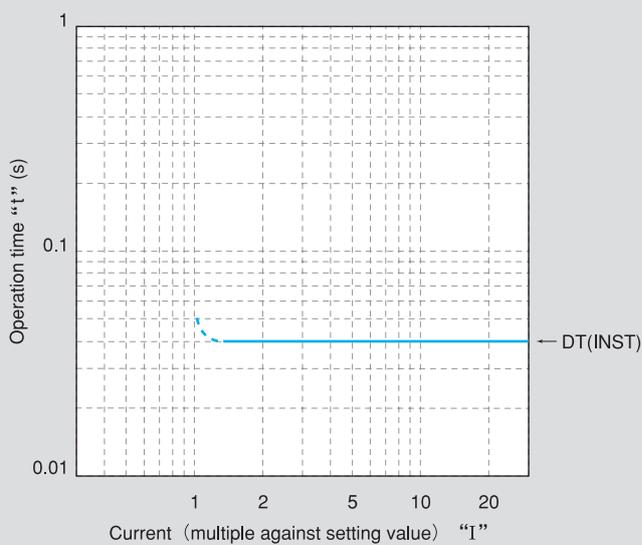

DT(INST): Definite time-lag characteristic
t < 0.04 (s)

t: Operation time

I: Input current multiplying factor against set value

Specifications

Name		Overcurrent Relay	Voltage Relay	
Type		COC4-A02S1	CBV2-A02S1	
Ratings	Frequency	50Hz or 60Hz	50Hz or 60Hz	
	CT·VT	5A	110V	
	ZCT·EVT	—	—	
Specifications	Settings	<p>Phase fault Time-lag (51) Operation value: LOCK-1.0~12.0A (0.1A step) Time multiplier: 0.25-0.5~50.0 (0.5 step) Operation characteristic Extremely inverse Very inverse Normal inverse Long inverse Definite time</p> <p>Phase fault Instantaneous(50) Operation value: LOCK-10~80A (0.5A step) Operation Time: INST (40ms or less)</p> <p>Earth fault Time-lag (51N) Operation value: LOCK-0.25~4.00A (0.05A step) Time multiplier: 0.25-0.5~50.0 (0.5 step) Operation characteristic Extremely inverse Very inverse Normal inverse Long inverse Definite time</p> <p>Earth fault Instantaneous(50N) Operation value: LOCK-2.0~20.0A (0.5A step) Operation Time: INST (40ms or less)</p>	<p>Under Voltage (27) Operation value: LOCK-60~120V (1V step) Operation Time: INST-0.1~5.0s (0.1s step)</p> <p>Over Voltage (59) Operation value: LOCK-120~165V (1V step) Operation Time: INST-0.1~5.0s (0.1s step)</p>	
		Protection Elements	3I > (51) 3I >> (50) Io > (51N) Io >> (50N)	3U < (27) 3U > (59)
		Measurement	·Current	·Voltage
Applications		Contains 3-phase overcurrent element and an earth fault overcurrent element; phase fault and earth fault protection of a 3-phase circuit in a resistance earthed neutral system can be achieved with 1 relay. See figure 1.	Contains 3-phase undervoltage element and 3-phase overvoltage element, being used to detect abnormal voltage between lines. See figure 2.	

Connection Diagram

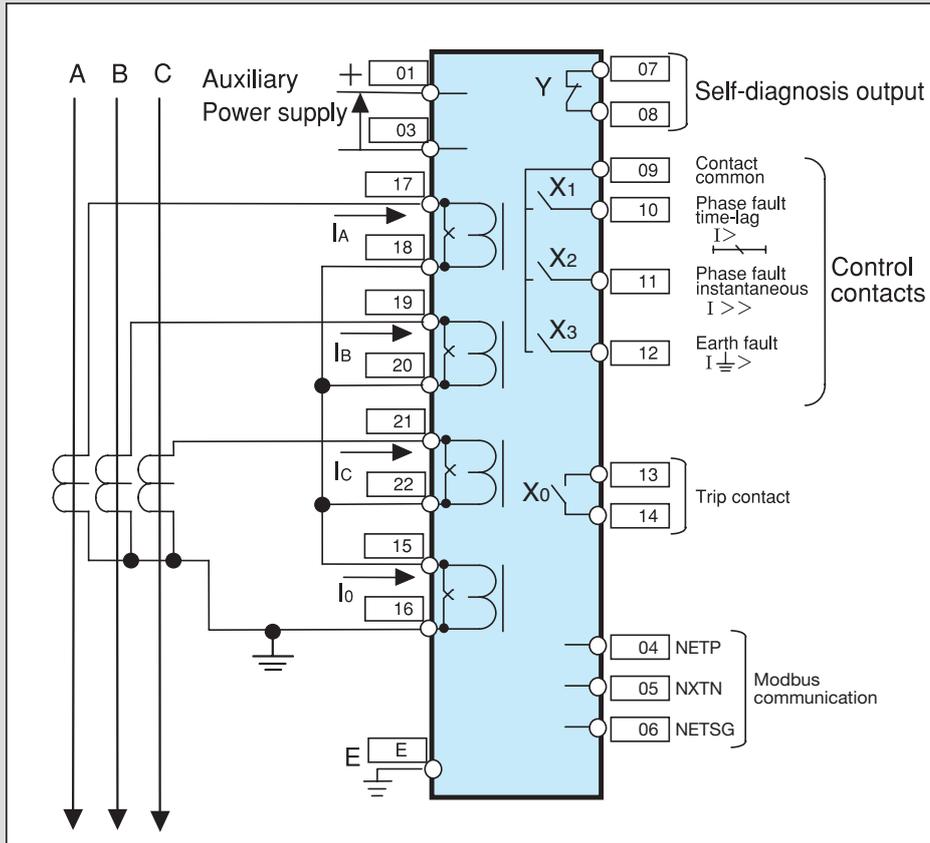


Figure1 COC4-A02S1


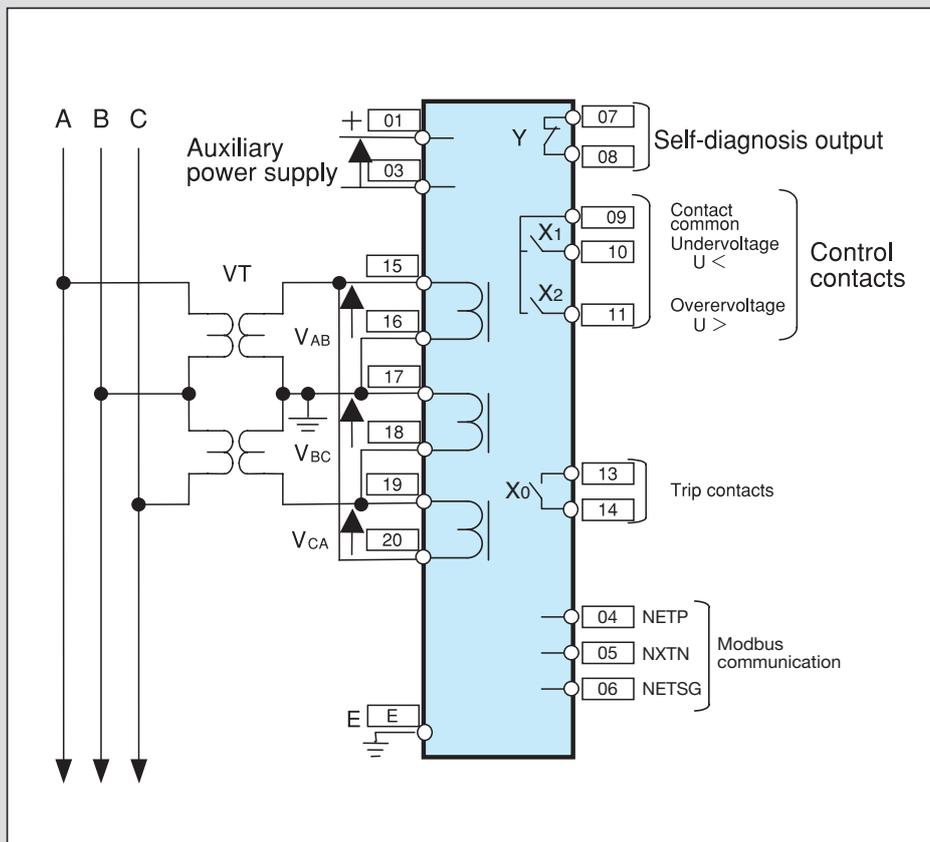


Figure2 CBV2-A02S1

Numerical Relay MELPRO-S Series

Mounting and Dimensions

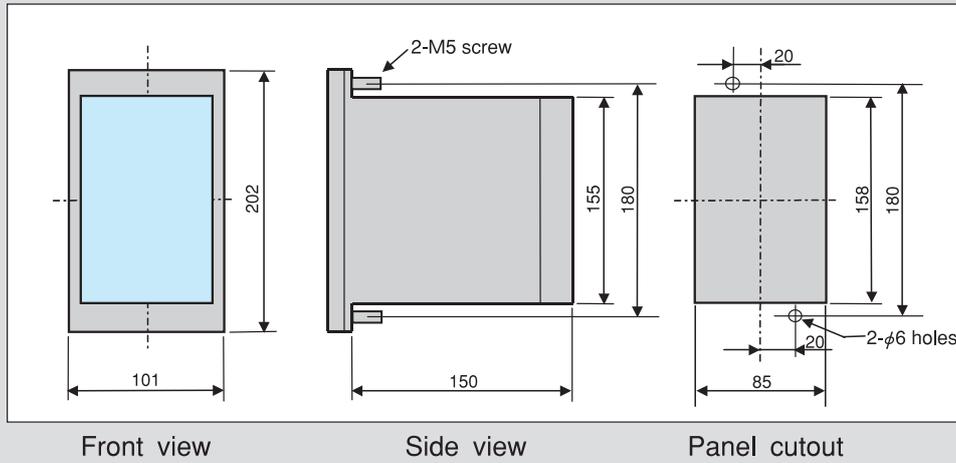

CAUTION

TO PREVENT IT FROM THE RISK OF DAMAGE AND MAL FUNCTION,
BE SURE TO READ OPERATING AND MAINTENANCE (SERVICING)
INSTRUCTIONS BEFORE USING.

HEAD OFFICE : 7-3 MARUNOUCHI 2-CHOME, CHIYODA-KU
TOKYO, 100-8310, JAPAN

We are waiting your technical contacts by FAX.
ATTN. Protective relay technical service
FAX NO. JAPAN +81-78-682-8051