


General Spec.


Item	Spec.	Remarks
Ambient conditions	Ambient temperature (under operation)	-10~40°C
	Ambient temperature (under storage)	-10~50°C
	Humidity	30~90%RH
	Altitude	Less than 1000m
Withstand voltage	Withstand voltage	Commercial frequency, AC2000V 1min.
	Impulse withstand voltage	In compliance with JEC210, IEEE472

Advantage of MEC700AVR

- Realize 5msec sampling time with 32-bit RISC processor.
- Better space factor in a cubicle by downsizing to be an integrated unit.
- Dual system configuration using duplex cable connections of 2 units.
- Correction by Q axis reactance for Δf -PSS and standard equipment of torsional frequency removal filter. ($\Delta\omega$ signal is optional)
- All interfaces is cable and installed front or bottom side. All connector has different shape for preventing from wrong connection.

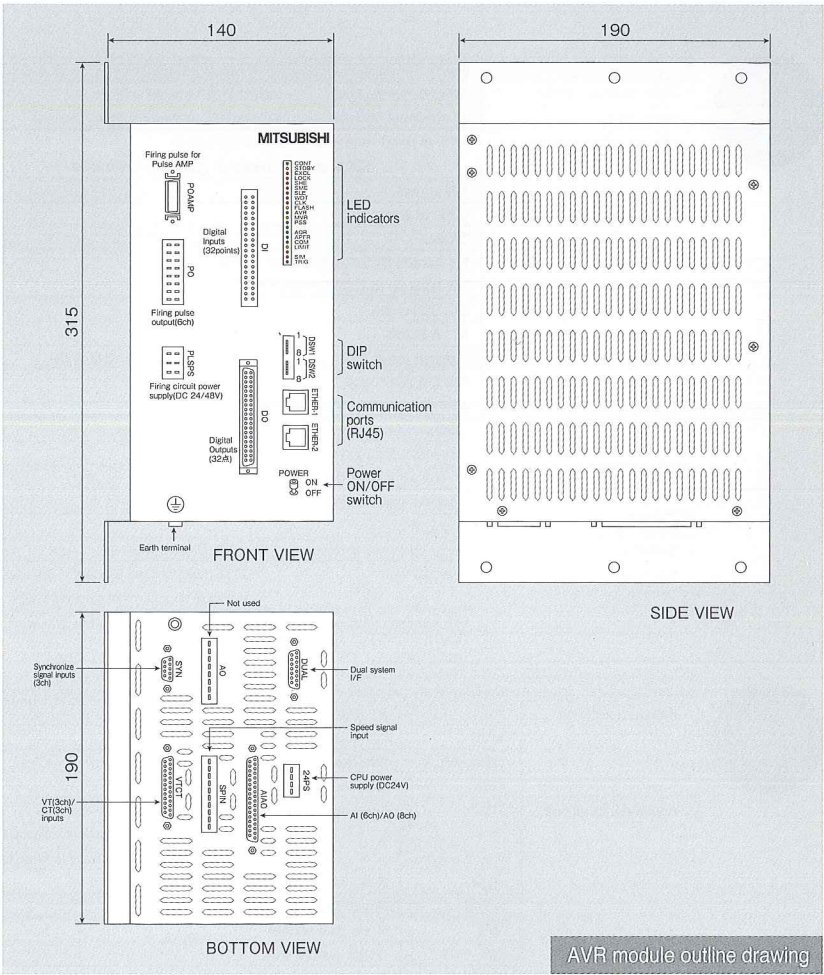

Digital Automatic Voltage Regulator
(MEC700 D-AVR)

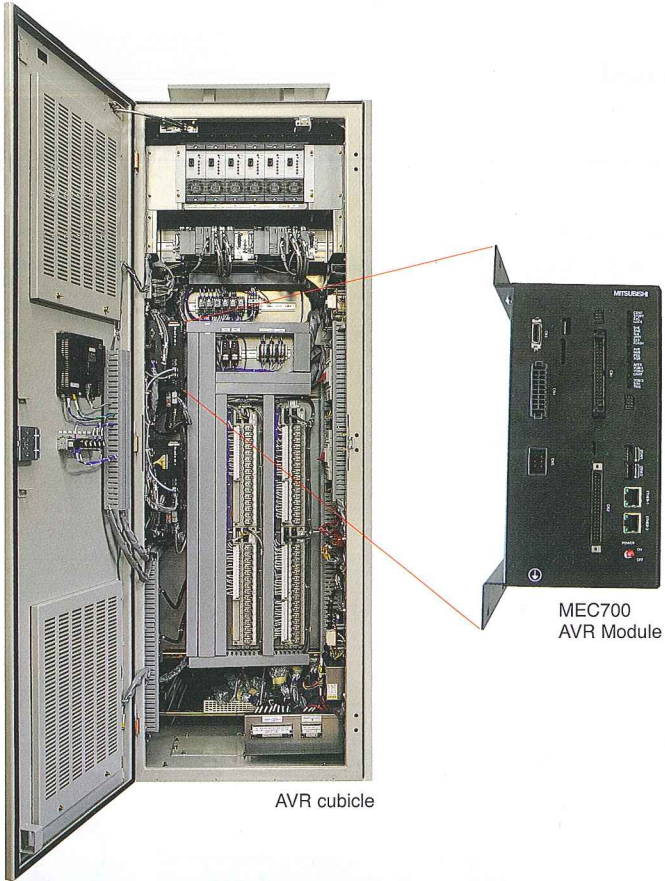

for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
<http://Global.MitsubishiElectric.com>

Safety Precautions

Improper use of products can cause severe injury or death and may result in damage to product and other property.
Please read instruction manual before installing or using product.



The digital automatic voltage regulator (D-AVR) is indispensable for operations. It regulates synchronous generator voltage, and is therefore required to have superior reliability, easy operation and maintenance. D-AVR MEC700 is developed and produced which achieve easier maintenance and environmental load-reducing.

Advantage


High reliability · High functionality · High-performance control

- High speed computation using a 32-bit high-speed RISC processor.
 - Superior control accuracy using a 16-bit analog-digital conversion.
 - ΔP type and Δf type PSS are equipped as power grid stabilizing functions.
Applicable to $\Delta\omega$ system PSS with an optional card.
 - Reboot function permits automatic recover from a transient fault.
- Operation · Maintenance
- Maintenance tool can monitor, operate, parameter set and trend graph display at fault condition.
 - Allows quick detection of faulty positions with LED display, maintenance tool alarm system and CPU fault information display.
 - High density functions are realized by using box-type module and functional software.
 - When dual system is consisted, On-line replacing is applicable. Moreover interface connectors are selected different shape to prevent wrong connection.
 - High space efficiency and easier maintenance with high-density and downsizing by use of functional software.
 - In order to support periodical inspections, Software and a maintenance tool for tests are provided.

Environmental load-reducing

- Environmental load- reducing by downsizing and less power.

System configuration (dual, thyristor excitation system)

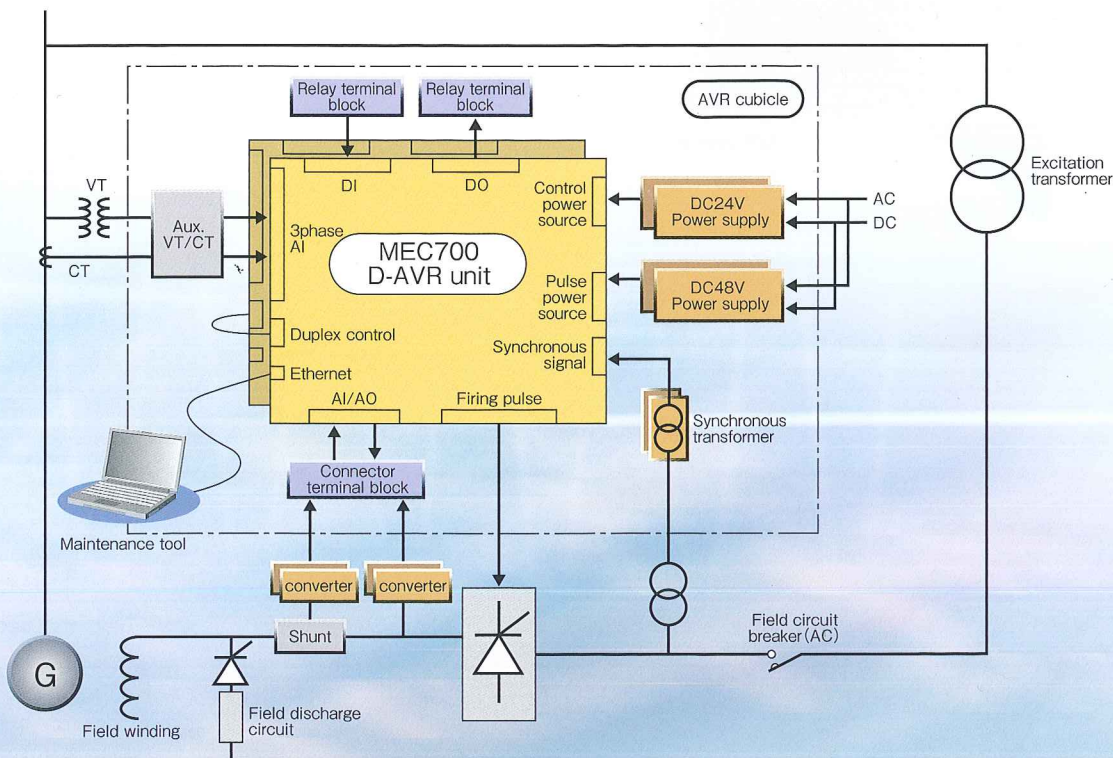

Performance

Item	Spec.	Remarks
Auto. Voltage setting range (90R)	At generator no-load 10~110% of rated voltage At generator on-load 95~105% of rated voltage	
Manual voltage setting range (70E)	10% of rated voltage at generator no-load to 120% of field voltage at generator rated load	
Voltage offset error	1% or less	
Voltage detection accuracy	0.5% or less	
CPU sampling time	5msec	240MHz 32bit RISC processor
Power source	For control DC24V±5%, 35W or less For firing pulse DC24V/48V±5%	
Interface	DI : 32 points DO : 32 points AI : 6 points AO : 8 points 3 phase input : VT : 3 phase CT : 3 phase or single phase Firing pulse output : 6 points 4parallels thyristor are available (around 5000A) Speed input (Electromagnetic pick up, for $\Delta\omega$ -PSS) Ethernet : 2 channels	±10V Max. 10 parallels with connecting pulse amplifier units. (Optional) Optional card is necessary.
Trend function	Analog 16points, digital 16points ±10sec. from a trigger, 5times reservable.	Display in a maintenance tool CSV data is available
Event history	4096 cases	Display in a maintenance tool
Self-diagnosis functions	Basic hardware and software WDT, Clock loss Analog input VT/CT zero phase · unbalance detection Maximum and minimum input detection Firing pulse control Synchronous signal loss, loss of pulse	

Control function

Function	Details
Standard function	AVR Constant voltage control MVR Constant field control MEL/UEL Minimum/Under excitation limit OEL Over-excitation limit
Additional functions	PSS Power system stabilizer ΔP -PSS Δf -PSS (with Q-axis reactance compensate) $\Delta\omega$ -PSS (optional card is necessary) with torsional filter with torsional filter AQR Reactive power regulation APFR Power factor regulation VFL V/Hz limit control SCL Stator current limit CCC Cross current compensation LDC/RDC Line (reactance, resistance) voltage drop compensation Others SFC, Electric brake field control, Line charge

Maintenance tool

- Windows® PC base
- Monitor, control, parameter conditioning
- Trend display
- Event log display
- Conditioning test assist

