

< DIPIPM > **PSS50SA2FT** TRANSFER MOLDING TYPE

INSULATED TYPE



MAIN FEATURES AND RATINGS

- 3 phase DC/AC inverter
- 1200V / 50A
- Built-in LPT-CSTBT (6th generation IGBT)
- Built-in bootstrap diodes with current limiting resistor
- Insulated transfer molding package
- N-side IGBT open emitter


APPLICATION

• AC 400V class motor control

INTEGRATED DRIVE, PROTECTION AND SYSTEM CONTROL FUNCTIONS

- For P-side : Drive circuit, High voltage high-speed level shifting, Control supply under-voltage (UV) protection
- For N-side : Drive circuit, Control supply under-voltage protection (UV), Short circuit protection (SC)
- Fault signaling : Corresponding to SC fault (N-side IGBT), UV fault (N-side supply)
- Temperature output : Outputting LVIC temperature by analog signal
- Input interface : 5V line, Schmitt trigger receiver circuit (High Active)
- UL Recognized : UL1557 File E80276

INTERNAL CIRCUIT

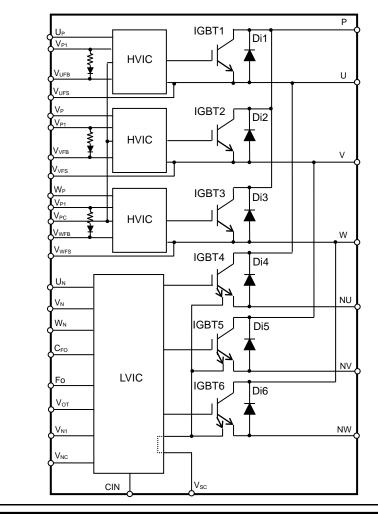

MITSUBISHI ELECTRIC CORPORATION

MAXIMUM RATINGS ($T_j = 25^{\circ}C$, unless otherwise noted)

INVERTER PART

Symbol	Parameter	Condition		Ratings	Unit
V _{cc}	Supply voltage	Applied between P-NU,NV,NW		900	V
V _{CC(surge)}	Supply voltage (surge)	Applied between P-NU,NV,NW		1000	V
V _{CES}	Collector-emitter voltage			1200	V
±lc	Each IGBT collector current	T _C = 25°C	(Note 1)	50	А
±I _{CP}	Each IGBT collector current (peak)	$T_{C}= 25^{\circ}C$, up to 1ms		100	А
Pc	Collector dissipation	T _c = 25°C, per 1 chip		123.4	W
Tj	Junction temperature			-30~+150	°C
Note 1: Puls	e width and period are limited due to junction	temperature.			


CONTROL (PROTECTION) PART

Symbol	Parameter	Condition	Ratings	Unit
VD	Control supply voltage	Applied between V _{P1} -V _{PC} , V _{N1} -V _{NC}	20	V
V _{DB}	Control supply voltage	Applied between VUFB-VUFS, VVFB-VVFS, VWFB-VWFS	20	V
V _{IN}	Input voltage	Applied between U _P , V _P , W _P -V _{PC} , U _N , V _N , W _N -V _{NC}	-0.5~V _D +0.5	V
V _{FO}	Fault output supply voltage	Applied between Fo-V _{NC}	-0.5~V _D +0.5	V
I _{FO}	Fault output current	Sink current at Fo terminal	5	mA
V _{SC}	Current sensing input voltage	Applied between CIN-V _{NC}	-0.5~V _D +0.5	V

TOTAL SYSTEM

Symbol	Parameter	Condition	Ratings	Unit
V _{CC(PROT)}	Self protection supply voltage limit (Short circuit protection capability)	$V_D = 13.5 \sim 16.5 V$, Inverter Part T _i = 125°C, non-repetitive, up to 2µs	800	V
Tc	Module case operation temperature	Tc measurement point is defined in Fig.1.	-30~+100	°C
T _{stg}	Storage temperature		-40~+125	°C
V _{iso}	Isolation voltage	60Hz, Sinusoidal, AC 1min, between connected all pins and heat sink plate	2500	V _{rms}

Fig. 1: T_C MEASUREMENT POINT

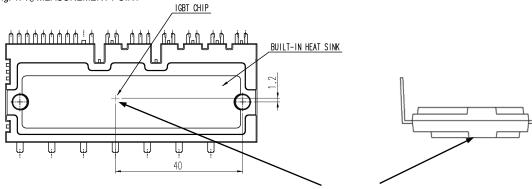

Measurement point for Tc

THERMAL RESISTANCE

Symbol	Baramatar	Condition		Limits		
Symbol Parameter		Condition		Тур.	Max.	Unit
R _{th(j-c)Q}	Junction to case thermal	Inverter IGBT part (per 1/6 module)	-	-	0.81	K/W
R _{th(j-c)F}	resistance (Note 2)	Inverter FWDi part (per 1/6 module)	-	-	1.25	K/W

Note 2: Grease with good thermal conductivity and long-term endurance should be applied evenly with about +100µm~+200µm on the contacting surface of DIPIPM and heat sink. The contacting thermal resistance between DIPIPM case and heat sink Rth(c-f) is determined by the thickness and the thermal conductivity of the applied grease. For reference, Rth(c-f) is about 0.2K/W (per 1/6 module, grease thickness: 20µm, thermal conductivity: 1.0W/m•k).

ELECTRICAL CHARACTERISTICS ($T_j = 25^{\circ}C$, unless otherwise noted) **INVERTER PART**

Symbol	Parameter	Condi	Limits				Unit
Symbol	Falameter	Condi	Condition		Тур.	Max.	Unit
M	Collector-emitter saturation	(1 - 1) = 15 (1 - 5) (1 - 5)	T _j = 25°C	-	1.70	2.40	v
V _{CE(sat)}	voltage	$V_{D}=V_{DB} = 15V, V_{IN} = 5V, I_{C} = 50A$	T _j = 125°C	-	2.00	2.50	v
V_{EC}	FWDi forward voltage	$V_{IN} = 0V, -I_C = 50A$		-	2.50	3.20	V
t _{on}			0.70	1.80	2.50	μs	
t _{C(on)}		$V_{CC} = 600V, V_{D} = V_{DB} = 15V$		-	0.50	0.80	μs
t _{off}	Switching times	00 / 5 55		-	2.60	3.80	μs
t _{C(off)}			-	0.50	0.90	μs	
t _{rr}			-	0.50	-	μs	
1	Collector-emitter cut-off		T _j = 25°C	-	-	1	mA
ICES	current	V _{CE} =V _{CES}	T _i = 125°C	-	-	10	IIIA

CONTROL (PROTECTION) PART

Cumbal	Parameter		Condition			Limits		Unit
Symbol	Parameter		Condition		Min.	Тур.	Max.	
1		Total of V_{P1} - V_{PC} , V_{N1} - V_{NC}			-	-	5.60	
I _D	- Circuit current	TOTAL OL VP1-VPC, VN1-VNC	$V_D=15V, V_{IN}=5V$		-	-	5.60	A
1	Each part of V _{UFB} -V _{UFS} , V _{VFB} -V _{VFS} , V _{WFB} -V _{WFS}	Each part of VUFB-VUFS,	V_{DB} =15V, V_{IN} =0V		-	-	1.10	mA
I _{DB}		$V_{\text{VFB}}\text{-}V_{\text{VFS}}, V_{\text{WFB}}\text{-}V_{\text{WFS}}$	V_{DB} =15V, V_{IN} =5V		-	-	1.10	
I _{SC}	Short circuit trip level		-30°C≤Tj≤125°C, Rs=34.0Ω (±1%), Not connecting outer shunt resistors to (Note 3) NU.NV.NW terminals		85	-	-	A
UV_{DBt}	P-side Control supply	T <405%	Trip level		10.0	-	12.0	V
UV_{DBr}	under-voltage T _j ≤125°C protection(UV)	l _j ≤125℃	Reset level		10.5	-	12.5	V
UV _{Dt}	N-side Control supply	T <405%	Trip level		10.3	-	12.5	V
UV_{Dr}	under-voltage protection(UV)	T _j ≤125°C	Reset level		10.8	-	13.0	V
V_{FOH}	Foult output voltage	V _{SC} = 0V, F ₀ terminal pulled	d up to 5V by 10kΩ		4.9	-	-	V
V _{FOL}	Fault output voltage	$V_{SC} = 1V$, $I_{FO} = 1mA$			-	-	0.95	V
t _{FO}	Fault output pulse width	C _{FO} =22nF		(Note 4)	1.6	2.4	-	ms
I _{IN}	Input current	$V_{IN} = 5V$			0.70	1.00	1.50	mA
V _{th(on)}	ON threshold voltage	Applied between U _P , V _P , W			-	-	3.5	v
$V_{\text{th(off)}}$	OFF threshold voltage		P, O_N, V_N, VVN^-VNC		0.8	-	-	v
V _{OT}	Temperature output	LVIC temperature = 75°C		(Note 5)	2.26	2.38	2.51	V
V _F	Bootstrap Di forward voltage	I _F =10mA including voltage drop by limiting resistor (Note 6)		0.5	0.9	1.3	V	
R	Built-in limiting resistance	Included in bootstrap Di			16	20	24	Ω


Note 3: Short circuit protection detects sense current divided from main current at N-side IGBT and works for N-side IGBT only. In the case that outer shunt resistor is inserted into main current path, protection current level I_{SC} changes. For details, please refer the application note for this DIPIPM.

4: Fault signal is output when short circuit or N-side control supply under-voltage protection works. The fault output pulse-width t_{FO} depends on the capacitance of C_{FO} . (C_{FO} (typ.) = $t_{FO} \times 9.1 \times 10^6$) [F])

CFO. (CFO (typ.) = tFO x 9.1 x 10⁻⁶) [F])
 5: DIPIPM doesn't shut down IGBTs and output fault signal automatically when temperature rises excessively. When temperature exceeds the protective level that user defined, controller (MCU) should stop immediately. Temperature of LVIC vs. Vot output characteristics is described in Fig.3

6: The characteristics of bootstrap Di is described in Fig.2.

Fig. 2 Characteristics of bootstrap Di V_F-I_F curve (@Ta=25°C) including voltage drop by limiting resistor (Right chart is enlarged chart.)







Fig. 3 Temperature of LVIC vs. Vot Output Characteristics

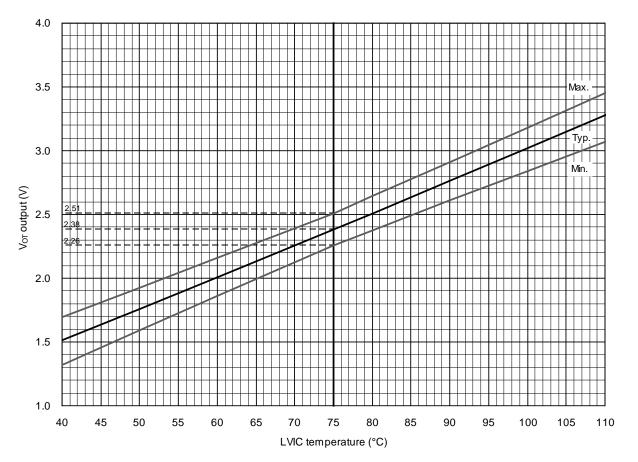

Inside LVIC of DIPIPM Temperature Signal Ref H Signal

(1) It is recommended to insert 5.1kΩ pull down resistor for getting linear output characteristics at low temperature below room temperature. When the pull down resistor is inserted between V_{OT} and V_{NC}(control GND), the extra circuit current, which is calculated approximately by V_{OT} output voltage divided by pull down resistance, flows as LVIC circuit current continuously. In the case of using V_{OT} for detecting high temperature over room temperature only, it is unnecessary to insert the pull down resistor.
 (2) In the case of not using V_{OT}, leave V_{OT} output NC (No Connection).


Refer the application note for this product about the usage of V_{OT} .

MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Cons	Condition		Limits			
Farameter	Conc		Min.	Тур.	Max.	Unit	
Mounting torque	Mounting screw : M4 (Note 7)	Recommended 1.18N·m	0.98	1.18	1.47	N∙m	
Terminal pulling strength	Load 19.6N	JEITA-ED-4701	10	-	-	S	
Terminal bending strength	Load 9.8N, 90deg. bend	JEITA-ED-4701	2	-	-	times	
Weight			-	46	-	g	
Heat-sink flatness	(Note 8)			-	100	μm	

Note 7: Plain washers (ISO 7089~7094) are recommended.

Note 8: Measurement point of heat-sink flatness




RECOMMENDED OPERATION CONDITIONS

Symbol	Deremeter	Condition			Limits		Unit
Symbol	Parameter	Condition	Condition		Тур.	Max.	Unit
V _{cc}	Supply voltage	Applied between P-NU, NV, NW		350	600	800	V
VD	Control supply voltage	Applied between V _{P1} -V _{PC} , V _{N1} -V _{NC}		13.5	15.0	16.5	V
V _{DB}	Control supply voltage	Applied between V _{UFB} -V _{UFS} , V _{VFB} -V _{VFS} , V _V	VFB-VWFS	13.0	15.0	18.5	V
$\Delta V_D, \Delta V_{DB}$	Control supply variation				-	+1	V/µs
t _{dead}	Arm shoot-through blocking time	For each input signal		3.0	-	-	μs
f _{PWM}	PWM input frequency	T _c ≤ 100°C, T _j ≤ 125°C		-	-	20	kHz
	Allowable r.m.s. current	Sinusoidal PWM	f _{PWM} = 5kHz	-	-	25	Armo
IO	Allowable I.III.S. current		f _{PWM} = 15kHz	-	-	13	Arms
PWIN(on)			(Note 10)	1.5	-	-	
PWIN(off)	Minimum input pulse width	ut pulse width $350 \le V_{CC} \le 800V, 13.5 \le V_{D} \le 16.5V, 13.0 \le V_{DB} \le 18.5V, -20^{\circ}C \le T_{C} \le 100^{\circ}C,$	I _C ≤50A	3.0	-	-	μs
PVVIN(OII)	N line wiring inductance less than 10nH (Note11)	50 <i<sub>C≤85A</i<sub>	3.5	-	-]	
V _{NC}	V _{NC} variation	Between V _{NC} -NU, NV, NW (including sur	ge)	-5.0	-	+5.0	V
Tj	Junction temperature			-20	-	+125	°C

Note

9: The allowable r.m.s. current value depends on the actual application conditions.
10: DIPIPM might not make response to the input on signal with pulse width less than PWIN (on).
11: IPM might make no response or delayed response (P-side IGBT only) for the input signal with off pulse width less than PWIN(off). Please refer below figure about delayed response.

Fig. 4 About Delayed Response Against Shorter Input Off Signal Than PWIN(off) (P-side only)

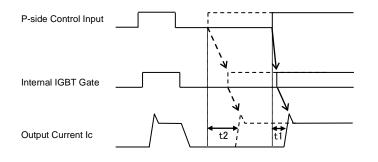


...Off pulse width \geq PWIN(off); Solid line Turn on time t1 (Normal delay) Broken line ···Off pulse width < PWIN(off);

Turn on time t2 (Longer delay in some cases)


Fig. 5 Timing Charts of DIPIPM Protective Functions

- [A] Short-Circuit Protection (N-side only with the external sense resistor and RC filter)
- a1. Normal operation: IGBT ON and outputs current.
- a2. Short circuit current detection (SC trigger)
 - (It is recommended to set RC time constant 1.5~2.0µs so that IGBT shut down within 2.0µs when SC occurs.)
- a3. All N-side IGBT's gates are hard interrupted.
- a4. All N-side IGBTs turn OFF.
- a5. F_{O} outputs with a fixed pulse width determined by the external capacitor $C_{\text{FO}}.$
- a6. Input = "L": IGBT OFF
- a7. Fo finishes output, but IGBTs don't turn on until inputting next ON signal (L \rightarrow H).
- (IGBT of each phase can return to normal state by inputting ON signal to each phase.)
- a8. Normal operation: IGBT ON and outputs current.

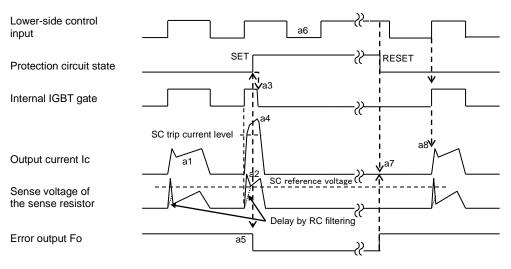

[B] Under-Voltage Protection (N-side, UV_D)

- b1. Control supply voltage V_D exceeds under voltage reset level (UV_{Dr}), but IGBT turns ON by next ON signal (L \rightarrow H). (IGBT of each phase can return to normal state by inputting ON signal to each phase.)
- b2. Normal operation: IGBT ON and outputs current.
- b3. V_D level drops to under voltage trip level. (UV_{Dt}).
- b4. All N-side IGBTs turn OFF in spite of control input condition.
- b5. Fo outputs for the period determined by the capacitance C_{FO_i} but output is extended during V_D keeps below UV_{Dr} .
- b6. V_D level reaches UV_{Dr}.
- b7. Normal operation: IGBT ON and outputs current by next ON signal (L \rightarrow H).

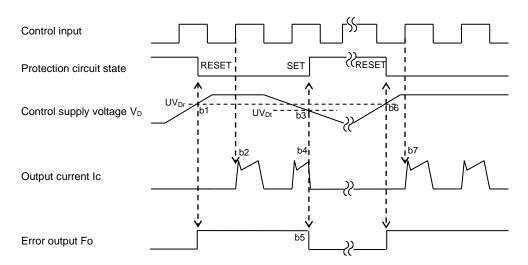

[C] Under-Voltage Protection (P-side, UV_{DB})

- c1. Control supply voltage V_{DB} rises. After the voltage reaches under voltage reset level UV_{DBr}, IGBT turns on by next ON signal (L→H).
- c2. Normal operation: IGBT ON and outputs current.
- c3. V_{DB} level drops to under voltage trip level (UV_{DBt}).
- c4. IGBT of corresponding phase only turns OFF in spite of control input signal level, but there is no Fo signal output.
- c5. V_{DB} level reaches UV_{DBr} .
- c6. Normal operation: IGBT ON and outputs current by next ON signal (L \rightarrow H).


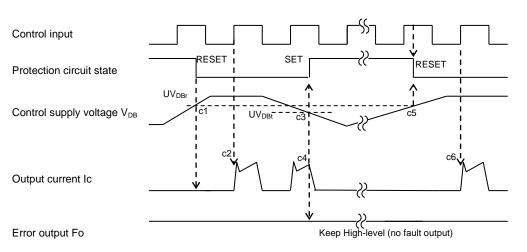


Fig. 6 MCU I/O Interface Circuit




Note)


Design for input RC filter depends on the PWM control scheme used in the application and the wiring impedance of the printed circuit board.

But because noisier in the application for 1200V, it is strongly recommended to insert RC filter. (Time constant: over 100ns. e.g. 100Ω , 1000pF)

The DIPIPM input signal interface integrates a min. $3.3k\Omega$ pull-down resistor. Therefore, when using RC filter, be careful to satisfy turn-on threshold voltage requirement.

Fo output is open drain type. It should be pulled up to the positive side of 5V or 15V power supply with the resistor that limits Fo sink current I_{Fo} under 1mA. In the case of pulling up to 5V supply, over $5.1k\Omega$ is needed. (10k Ω is recommended.)






Low inductance shunt resistor like surface mounted (SMD) type is recommended. Protection current level I_{SC} changes by inserting shunt resistor.

< DIPIPM > **PSS50SA2FT** TRANSFER MOLDING TYPE INSULATED TYPE

Fig. 8 Example of Application Circuit

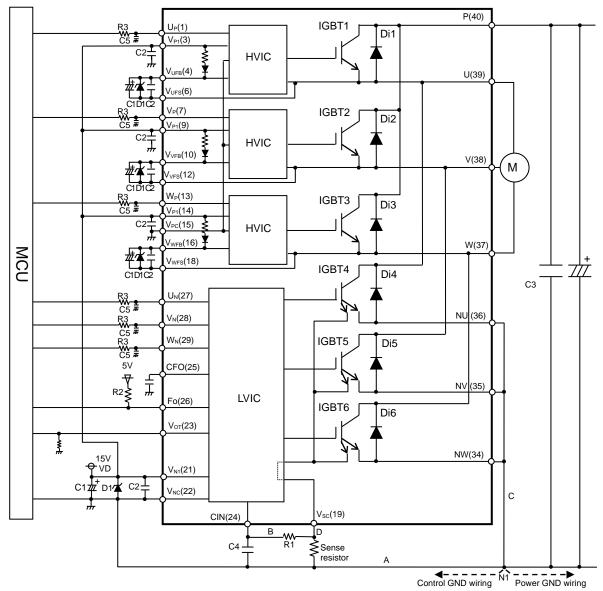


Note

- 1 : If control GND and power GND are patterned by common wiring, it may cause malfunction by fluctuation of power GND level. It is recommended to connect control GND and power GND at only a N1 point at which NU, NV, NW are connected to power GND line.
- 2 : It is recommended to insert a Zener diode D1 (24V/1W) between each pair of control supply terminals to prevent surge destruction.
- 3 :To prevent surge destruction, the wiring between the smoothing capacitor and the P, N1 terminals should be as short as possible. Generally inserting a 0.1µ~0.22µF snubber capacitor C3 between the P-N1 terminals is recommended.
- 4 :R1, C4 of RC filter for preventing protection circuit malfunction is recommended to select tight tolerance, temp-compensated type. The time constant R1C4 should be set so that SC current is shut down within 2µs. (1.5µs~2µs is general value.) SC interrupting time might vary with the wiring pattern, so the enough evaluation on the real system is recommended. If R1 is too small, it may leads to delay of protection. So R1 should be min. 10 times larger resistance than Rs. (100 times is recommended.)
- 5 :To prevent erroneous operation, the wiring of A, B, C should be as short as possible.
- 6 :For sense resistor, the variation within 1% (including temperature characteristics), low inductance type is recommended. And the over 0.03W is recommended, but it is necessary to evaluate in your real system finally.
- 7 :To prevent erroneous SC protection, the wiring from V_{SC} terminal to CIN filter should be divided at the point D that is close to the terminal of sense resistor. And the wiring should be patterned as short as possible.
- 8 :All capacitors should be mounted as close to the terminals of the DIPIPM as possible. (C1: good temperature, frequency characteristic electrolytic type, and C2: 0.01µ~2.0µF, good temperature, frequency and DC bias characteristic ceramic type are recommended.)
- 9 :Input drive is High-active type. There is a min. 3.3kΩ pull-down resistor in the input circuit of IC. To prevent malfunction, the wiring of each input should be as short as possible. And it is recommended to insert RC filter (e.g. R3=100Ω and C5=1000pF) and confirm the input signal level to meet the turn-on and turn-off threshold voltage. Thanks to HVIC inside the module, direct coupling to MCU without any opto-coupler or transformer isolation is possible.
- 10 :Fo output is open drain type. Fo output will be max 0.95V(@IFo=1mĀ,25°C), so it should be pulled up to MCU or control power supply (e.g. 5V,15V) by a resistor that makes IFo up to 1mA. (In the case of pulled up to 5V, 10kΩ is recommended.)
- 11 :Error signal output width (t_{F0}) can be set by the capacitor connected to C_{F0} terminal. C_{F0} (typ.) = $t_{F0} x 9.1 x 10^{-6} (F)$
- 12: If high frequency noise superimposed to the control supply line, IC malfunction might happen and cause erroneous operation. To avoid such problem, voltage ripple of control supply line should meet dV/dt ≤+/-1V/µs, Vripple≤2Vp-p.
- 13 :For DIPIPM, it isn't recommended to drive same load by parallel connection with other phase IGBT or other DIPIPM.

< DIPIPM > **PSS50SA2FT** TRANSFER MOLDING TYPE INSULATED TYPE

Fig. 9 Package Outlines

Dimensions in mm

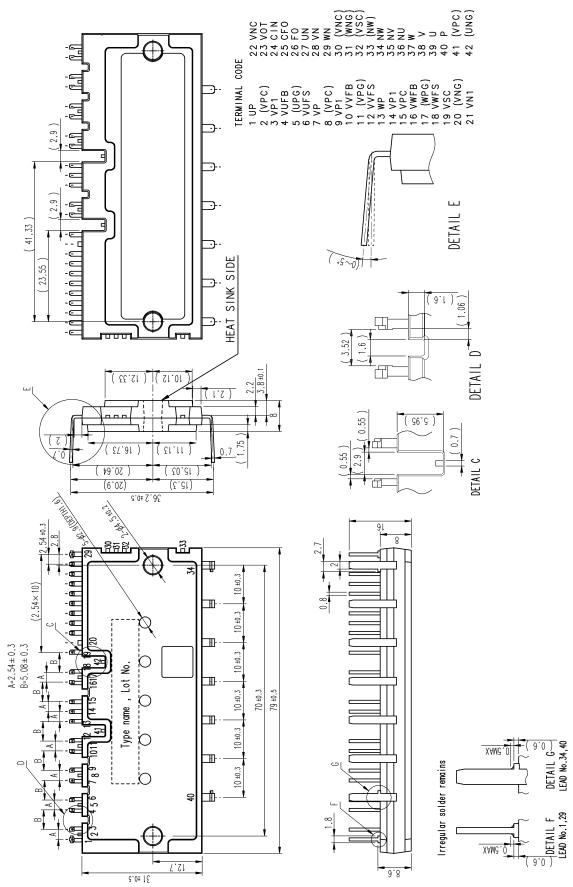

Important Notice

The information contained in this datasheet shall in no event be regarded as a guarantee of conditions or characteristics. This product has to be used within its specified maximum ratings, and is subject to customer's compliance with any applicable legal requirement, norms and standards.

Except as otherwise explicitly approved by Mitsubishi Electric Corporation in a written document signed by authorized representatives of Mitsubishi Electric Corporation, our products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

In usage of power semiconductor, there is always the possibility that trouble may occur with them by the reliability lifetime such as Power Cycle, Thermal Cycle or others, or when used under special circumstances (e.g. condensation, high humidity, dusty, salty, highlands, environment with lots of organic matter / corrosive gas / explosive gas, or situations which terminals of semiconductor products receive strong mechanical stress). Therefore, please pay sufficient attention to such circumstances. Further, depending on the technical requirements, our semiconductor products may contain environmental regulation substances, etc. If there is necessity of detailed confirmation, please contact our nearest sales branch or distributor.

The contents or data contained in this datasheet are exclusively intended for technically trained staff. Customer's technical departments should take responsibility to evaluate the suitability of Mitsubishi Electric Corporation product for the intended application and the completeness of the product data with respect to such application. In the customer's research and development, please evaluate it not only with a single semiconductor product but also in the entire system, and judge whether it's applicable. As required, pay close attention to the safety design by installing appropriate fuse or circuit breaker between a power supply and semiconductor products to prevent secondary damage. Please also pay attention to the application note and the related technical information.

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- •These materials are intended as a reference to assist our customers in the selection of the Mitsubishi Electric Semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- •Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- •All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Electric Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Electric Semiconductor home page (http://www.MitsubishiElectric.com/semiconductors/).

- •When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- •Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Electric Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- •The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- •If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.

Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.

•Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Electric Semiconductor product distributor for further details on these materials or the products contained therein.

DIPIPM and CSTBT are trademarks of MITSUBISHI ELECTRIC CORPORATION.

[©] MITSUBISHI ELECTRIC CORPORATION. ALL RIGHTS RESERVED.